




SAN MARINO INDUSTRIES LLC
Italian Design and Innovation

6 IN LED Disk Light

Installation Instructions




LED
Technology

MXTL1048-6LED15K92750

Thank you for purchasing this product. We've created these easy-to-follow instructions to ensure you spend your time enjoying the product instead of putting it together.

PACKAGE CONTENTS

A



x 1

HARDWARE CONTENTS

AA



(Not included) x 2

BB



(Not included) x 3



SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

WARNING/AVERTISSEMENT

- Be sure the electricity to the wires you are working on is shut off. Either remove the fuse or turn off en électricité des fils avec lesquels vous travaillez. Pour ce faire, vous pouvez retirer le fusible ou couper l'alimentation dthe circuit breaker.
- Risk of fire or electric shock. Do not alter, relocate, or remove wiring, lampholders, power supply or any other electrical component.
- Risk of fire or electric shock. LED retrofit kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
Min. lamp compartment: 5.51 in. diameter by 7.4 in. height.
- This retrofit kit is accepted as a component of a luminaire where the suitability of the combination shall be determined by authorities having jurisdiction.

CAUTION/ATTENTION


- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on. The user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and the receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- This Class B digital apparatus complies with Canadian ICES-003.
- Light output from this fixture has a beam angle of 110°.
- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- This item is dimmable down to 5% with most dimmers. Use with dimmers listed
LUTRON: CTCL-153P-WH, DV-600P-WH, SELV-300P-WH, LGCL-153PLH-IV, RRD6NA-WH, MACL-153M-BI, MSCL-0P153MH, MSCL-VP153MH, DVCL-153P-WH, MACL-153MLH-WH, PD-6WCL
LEVITON: IPE04, 6674, IPL06-10Z, PSD6-1LZ, 6615-P, 6633-PLW, 6672, DSL06-1LZ
LISTED: REL06, TG-600P-WH
EATON: SAL06P3

Questions, problems, missing parts? Before returning to your retailer, call our customer service department at +1-984 250 8353.

<https://www.sanmarinoindustries.com>

INSTALLATION OVERVIEW


1

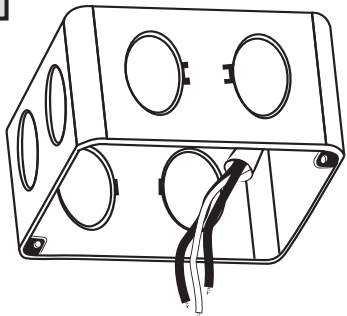

Junction Box


Supply Wires
White : Neutral
Black : Hot
Green : Ground

2

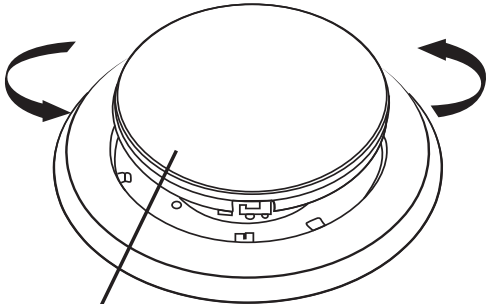


Lens

3

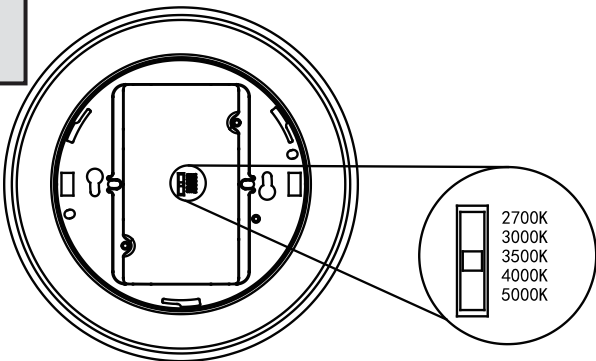


4

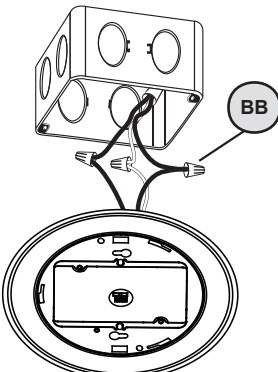

BB


Connect the fixture wires to the supply wires-black to black, white to white, and green to copper/bare. Secure wires together with BB.

5

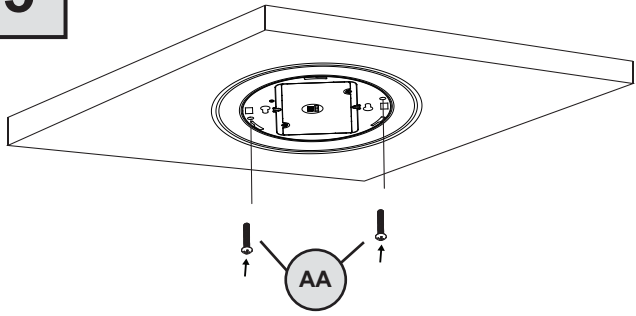

AA

6

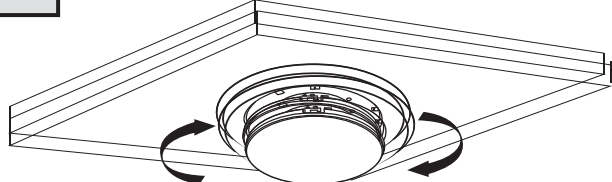

TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	CORRECTIVE ACTION
Fixture does not light.	Power is off, incorrect wire connection, or defective wall switch.	Check circuit breaker or wall switch, check wire splices, or replace wall switch.

CARE AND MAINTENANCE

Ensure power is off before cleaning. Clean with a mild glass cleaner and soft cloth. Apply liquid cleaner to cloth. Do not spray fixture itself.

WARRANTY

This fixture is warranted to be free from defects in materials and workmanship for 5 years from the date of original purchase. If it fails to do so, you may return it with proof of purchase to 1581 Corporate Dr, Ste 100, McKinney, TX 75069. You can reach us at contact@yankon-lighting.com. À défaut, vous pouvez le retourner avec la preuve d'achat à 1581 Corporate Dr, Ste 100, McKinney, TX 75069. Vous pouvez nous contacter à contact@yankon-lighting.com.